

AKKORTELLİ AYDINLATMA ARMATÜRLERİ


INCANDESCENT LIGHTING FIXTURES

EVC



Sınıflandırma / Classification
II 2G Ex d IIB T4 / II 2D Ex tD A21 Tmax..... IP65
Standartlar / Standards
EN 60079-0 / EN 60079-1/EN 61241-0 / EN 61241-1
Sertifika No. / Certificate No.
FTZU 09 ATEX 0269X / TSE 14.31.35-EX174

TAVAN TİPİ / CEILING MOUNTED

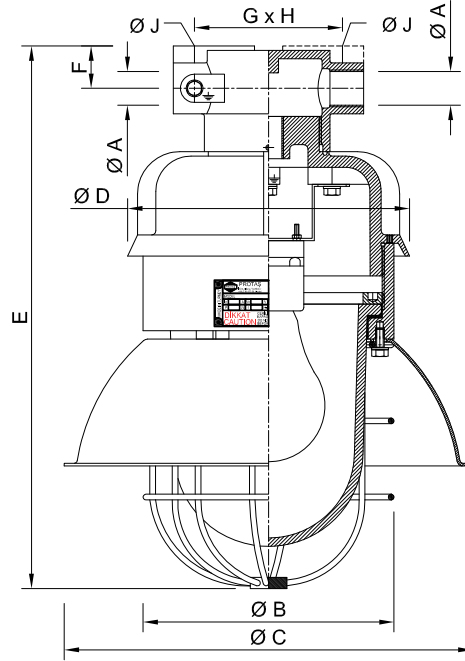

Model			Ağırlık (kg) Weight	Max. kablo çapı Max. cable diameter	Duy Tipi Caps	Ölçüler / Dimensions (mm)									
Reflektörsüz Without Reflector	Reflektörlü With Reflector	Güç Wattage				ØA		ØB	ØC	ØD	E	F	G	H	ØJ
						NPT	METRIC								
EVC.100	EVCR.100	100 W	3.00	Ø 14	E27	2 x 1/2"	2 x M20x1.5	130	270	152	295	15	45	70	7
EVC.200	EVCR.200	200 W	5.20	Ø 19	E27	2 x 3/4"	2 x M25x1.5	178	290	198	385	30	65	105	9
EVC.300	EVCR.300	300 W	7.30	Ø 19	E40	2 x 3/4"	2 x M25x1.5	265	420	283	513	30	65	105	9

Model	Lamba Tipi/Lamp Type	Güç Wattage (W)	Duy Caps	Işık Akısı (lümen) Luminaus flux	Renk Sıcaklığı (K) Color Temp.
EVC.100	Akkor Lamba / Incandescent Lamp	100	E27	1300	2700
	Enerji Tasarruflu Lamba / Energy Saving Lamp	23	E27	1505	2700
	Led Lamba / LED Lamp	9	E27	806	2700
EVC.200	Akkor Lamba / Incandescent Lamp	200	E27	3000	2700
	Enerji Tasarruflu Lamba / Energy Saving Lamp	42	E27	3110	6500
	Led Lamba / LED Lamp	13.5	E27	1521	2700
EVC.300	Akkor Lamba / Incandescent Lamp	300	E40	4000	2700
	Enerji Tasarruflu Lamba / Energy Saving Lamp	60	E27	4310	2700
	Enerji Tasarruflu Lamba / Energy Saving Lamp	75	E40	5550	6500

EVC.100 ürün girişleri 3/4" veya M25x1.5 olarak üretilir / Cable connection inputs may be manufactured 3/4" or metric 25x1.5 for EVC.100
Ampul dahil değildir / Bulb is excluded
Malzeme: Alüminyum ETIAL 140 Borosilikat camlı / Material: Aluminum ETIAL 140 with borosilicate glass

www.protas.com.tr